


# Wheels and accessories

**The wheel, one of humanity's greatest inventions, is the basis for our current speed and mobility. Wheels must withstand mechanical, chemical and thermal stress and remain reliably on track.**

Our non-marking wheels are manufactured from high-quality materials and equipped with precise and durable plain or precision ball bearings. All wheel types are also available to you in electrically conductive versions. They conform to current international standards and regulations. Here you will find an overview of the range of STEINCO wheels and accessories on which our castors are built.



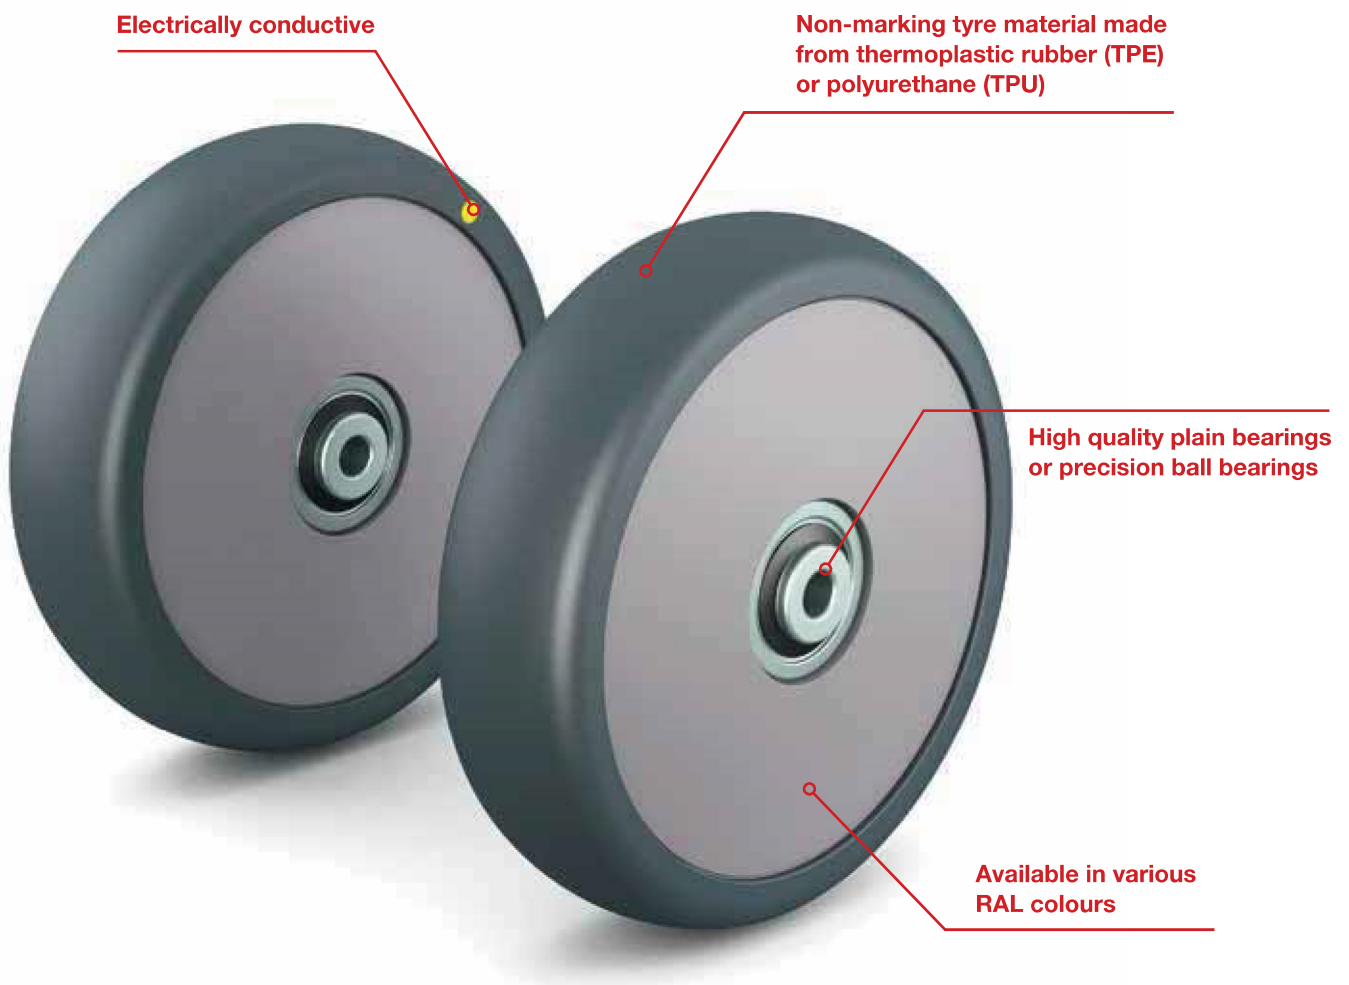

## Product benefits

- High-quality materials
- Resistant to mechanical, thermal and chemical stress
- Electrically conductive varieties
- Individualised colour options
- Broad range of accessories

**Ball bearings**



- Non-marking tyre
- polypropylene hubs
- thread guards
- grey

50	6,1	19	22	40	TPE	<b>UP2T0</b>	
75	6,1	22	28	60	TPE	<b>UP1T1</b>	
75	8,1	22	28	60	TPE	<b>UP161</b>	
100	8,1	24	30	70	TPE	<b>UPVB0</b>	



- Non-marking tyre
- polypropylene hubs  
(ø 150 mm made of polyamide)
- thread guards
- grey

75	8,1	30	40	70	TPE	<b>UNHA0</b>	
100	8,1	32	36	90	TPE	<b>UNDA0</b>	
125	8,1	32	36	100	TPE	<b>UNBA0</b>	
150	8,1	32	36	110	TPU	<b>UPKD0</b>	



- Non-marking tyre
- polyamide hubs
- thread guards
- grey

75	8,1	24	28	70	TPU	<b>UN6X0</b>	



- Electrically conductive non-marking tyre
- polypropylene hubs (ø 150 mm made of polyamide)
- thread guards
- grey

50	6,1	18	22	40	TPE	<b>UP2U0</b>	
75	6,1	22	28	60	TPE	<b>UP1U1</b>	
75	8,1	22	28	60	TPE	<b>UP171</b>	
100	8,1	32	36	90	TPE	<b>UNDB0</b>	
125	8,1	32	36	100	TPE	<b>UNBB0</b>	
150	8,1	32	36	110	TPU	<b>UPKC0</b>	

all measurements in mm

**Ball bearing wheels for usage as single wheel**



- Non-marking tyre
- polypropylene hubs
- with screw-on one-sided wheel cover
- grey
- white wheel cover

125	10	32	100	TPE	WCAB0
125	10	32	100	TPE	WCAA0
Hub width of 33.5 mm. Due to the cover, the axle bolts or axle screws may not exceed a length of 40 mm. Optional: electrically conductive version available on request.					



- Non-marking tyre
- polypropylene hubs
- with clip-on one-sided wheel cover
- grey

100	10	20	70	TPU	WCA00
125	10	20	70	TPU	WCA10
150	10	20	70	TPU	WCA20
Wheel cover in RAL 9002, further RAL colours available					
Distance between bearing and wheel cover: 8 mm Optional: electrically conductive version available on request					

**Plain bearing wheel**



- Non-marking tyre
- polypropylene hubs
- grey

50	6,4	19	22	40	TPE	<b>UJ501</b>	
75	6,4	23	28	60	TPE	<b>UHDT1</b>	
75	8,2	23	28	60	TPE	<b>UHD61</b>	
100	12,1	32	36	80	TPE	<b>UJKB0</b>	
125	12,1	32	36	90	TPE	<b>UJLB0</b>	



- Polyamide wheel
- black

38	6,2	19	20	40		<b>DA010</b>	
50	6,2	19	20	50		<b>DA310</b>	
50	8,2	19	20	50		<b>DA110</b>	
75	8,2	23	25	70		<b>DA800</b>	
100	10,2	25	29	80		<b>DA750</b>	
100	12,1	30	35	90		<b>DA7A0</b>	



- Polyamide wheel
- natural colour

60	12,1	30	40	100		<b>DB010</b>	

**Bumper wheels**



- Non-marking polyethylene wheel
- further colours on request

100	11,1	19	RAL7004		<b>DCAW0</b>	
100	18,1	19	RAL7004		<b>DCAL0</b>	
100	18,1	19	RAL7001		<b>DCAM0</b>	
100	22	19	RAL7004		<b>DCAR0</b>	
100	22	19	RAL7001		<b>DCAT0</b>	
100	25	19	RAL7004		<b>on request</b>	
100	25	19	RAL7001		<b>DCA00</b>	
100	27	19	RAL7004		<b>DCA50</b>	
125	22	19	RAL7004		<b>on request</b>	
125	22	19	RAL7001		<b>DCBA0</b>	

all measurements in mm

## Transport castor wheels



Ø	W	H	W	kg	UPKE0	UPKG0
150	8	32	36	150	UPKE0	UPKG0
150	8	32	44	150	UPKU0	UPKV0

### Technical specifications

- Ball bearing wheel with rustfree stainless steel ball bearing
- Polyamide hub (PA6), black RAL9011
- Polyurethane tyred (TPU), grey RAL7024
- Shore-Hardness 94

### Available options

- Steel ball bearing
- further hardnesses of wheels available, please contact STEINCO



Ø	W	H	W	kg	UQFN0	UQFP0
160	12	40	50	200	UQFN0	UQFP0
160	12	40	59	200	UQFT0	UQFU0
175	12	42	50	200	UQER0	UQES0
200	12	45	50	200	UQDN0	UQDP0
200	12	45	59	200	UQDT0	UQDU0

### Technical specifications

- Ball bearing wheel with rustfree stainless steel ball bearing
- Polyamide hub (PA6), black RAL9011
- Polyurethane tyred (TPU), grey RAL7024
- Shore-Hardness 80

### Available options

- Steel ball bearing
- further hardnesses of wheels available, please contact STEINCO